

CC40
Solid Door

Construction

- Constructed of Heavy-Duty extruded 6063 aluminum alloy
- Stainless Hardware
- Designed for 18" x 26" Trays
- Available in 1" or 1.5" Shelf Spacing Configurations
- Full & Half Size Mobile Units
- Door Swings 270 degrees with Stainless Steel Gravity Latch
- Solid Door Standard
- Available with Clear Door Option
- Fully Welded Assembly for Strength
- Custom Sizes Available

Frame

- Uprights are 2.5" x 1" channel
- Door, and base are 1/8" solid aluminum
- Top and rear panel are constructed from .090" solid aluminum
- Center support brace (full size only)
- Side ledge panels are tongue and groove with 1" or 1.5" spacing


Casters

- High Quality 5" Poly-U Casters for easy maneuverability
- Casters bolted to reinforced wheel channel

	Model Number	Overall Dimensions			Tray Cap	Runner Spacing	Ship Lbs.	List Price \$
		W	D	H				
1.5" Spacing	CC16	23"	28"	32"	16	1.5"	82	2107
	CC24	23"	28"	44"	24	1.5"	90	2107
	CC32	23"	28"	56"	32	1.5"	98	2198
	CC40	23"	28"	70"	40	1.5"	108	2288
1" Spacing	CC60	23"	28"	70"	60	1"	115	2502

CC Enclosed Cabinet Options: -CD, -520U, -620U, -COR, -BK, -B, -CB, -ODL
(see page 18 for option descriptions)

CABINETS

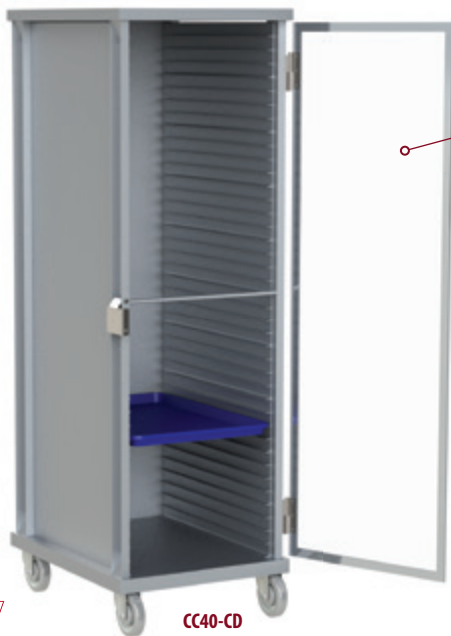

CC40-CD
Clear Door

NEW!
-CD: CLEAR DOOR OPTION
for Easy Viewing



CC24-CD
Clear Door



-620U
6" x 2" Heavy Duty
Poly Urethane Casters
Upgrade Option



CC16
Solid Door

