



SU65 – ALUMINUM ADJUSTABLE CANTILEVER SHELVING

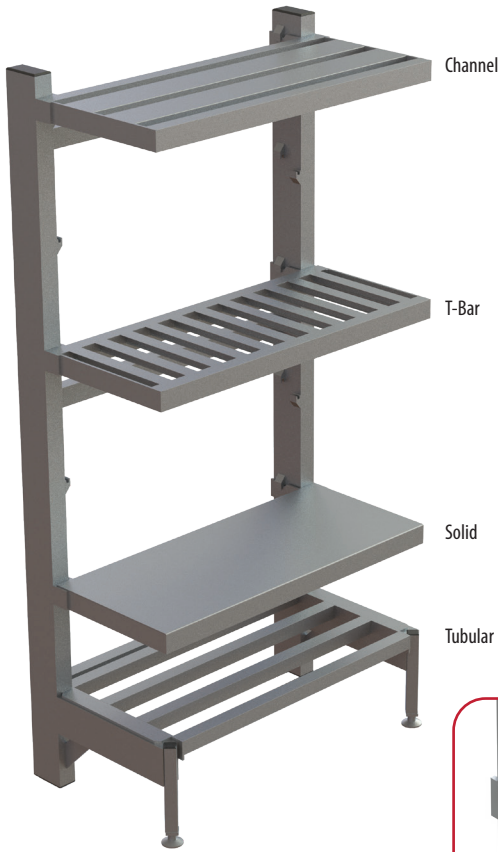

Full width shelf design with no frame to frame interference

Construction

- All Heavy-Duty extruded 6063 Aluminum Alloy
- Available in Heavy Duty Channel, Tubular, T-Bar, or Solid Top Shelves
- 18", 20" or 24" Standard Depths
- Available in 2, 3, or 4 Adjustable Shelf Configurations
- Lift-Off Bottom Tubular Shelf
- Adjustable Front Feet for Easy Leveling
- Fully Welded Shelf Frame Assemblies for Strength
- Custom Sizes Available

Frame

- Uprights are 2" x 4" x 1/8" tubing
- Lower support features a gusset-supported 2" x 4" x 1/8" tube and 1.5" heavy duty square tubing with an adjustable foot
- Custom heights available

Shelves

- Shelves are all aluminum, adjustable on 10" centers and fully welded
- Side braces use .25" x 2" flat bar welded to adjustment bracket
- Shelf cross braces and Tubular shelves use 1.5" square tubing
- E-Channel shelves use 4" wide channel
- T-Bar shelves use 1.5" wide T-Bar
- Solid shelves use .063" thick sheet metal over a reinforced tubular frame

See catalog or call factory for individual component pricing.

EXAMPLE: SU65-4820-4-T (Adjustable Cantilever Shelving [76 in. Height], 48 in. Width, 20 in. Depth, 4 Shelves, Tubular)

EX. break-down: SU65		-	48	20	-	4	-	T
Adjustable Cantilever Shelving		Height	Width	Depth	# of Shelves		Type	
SU65	Aluminum Adjustable Cantilever Shelving	72"	Std. Widths (in.):	Std. Depths (in.):	2	T	Tubular	
	<i>All Adjustable Cantilever Shelving are 72" in Height</i>		30	18	3	C	E-Channel	
			36	20	4	TB	T-Bar	
			42	24		S	Solid	
			48					
			54					
			60					

Build Your Aluminum Adjustable Cantilever Shelving Part Number

Select a code (in **BLUE**) from each category and fill in the boxes below. Use this Part Number when you order your Aluminum Adjustable Cantilever Shelving

SU65	-				-		-	
SU65	-				-		-	

Choice Equipment Company, Inc. warrants to the original purchaser that all of its goods and services sold shall be free of defect in material or workmanship during the twenty-four (24) months, twelve (12) months on wheels and casters, from the date of shipment or performance, provided the product has been used within the following restrictions:

1. The product was used for its intended purpose.
2. The product was properly handled, stored, installed, maintained and operated.
3. The product was not loaded beyond the product's load capacity.
4. The product is cleaned and maintained with a cleansing agent generally accepted by the industry and the instructions of the specific agent are followed.
5. Any abuse or misuse of, changes to, alteration of, or improper maintenance of original equipment shall void this warranty in its entirety.

If any product provided by Choice Equipment Company, Inc. shows defect in material or workmanship, CEC will, at its option, repair or replace the defective product if (1) CEC has received notice of such defects within the specified warranty period, and (2) upon CEC's request, the defective items is returned at CEC's cost to a location designated by CEC.